

Ideal Tap with Filtration

High Flow (HF) or Eco Flow (EF)

IWTF-D-PSS-HF
IWTF-D-PSS-EF

IWTF-D-MSS-HF
IWTF-D-MSS-EF

IWTF-D-GSS-HF
IWTF-D-GSS-EF

IWTF-D-BSS-HF
IWTF-D-BSS-EF

IWTF-D-YSS-HF
IWTF-D-YSS-EF

IWTF-D-RSS-HF
IWTF-D-RSS-EF




Specifications

Ideal Tap

- Single-lever control ceramic disk cartridge
- Forward rotating COMFORTFEEL™ lever handle
- 11" CENTERSTATION™ spout projection
- 11" Pot fill height from deck to spout outlet
- Hand spray extends up to 26" from spout
- Q-Dock™ docking system holds hand spray in place
- Ergonomic slide switch to select Ideal Flow. Laminar or Spray Flow
- Automatic return to laminar flow
- Concealed easy clean spray face
- Spout rotates 360°
- Quiet, smooth gliding hose
- Counterweight
- Dual check valves
- 24" stainless steel flexible hoses 3/8" compression
- Maximum counter thickness 2"
- Minimum install hole diameter 1 3/8"
- Optional base ring included
- Total height 21 1/4"
- High Flow 2.2 GPM* maximum flow rate
- Eco Flow 1.8 GPM* maximum flow rate
- For use with Water Filtration System (included)

*Note: May reduce water flow

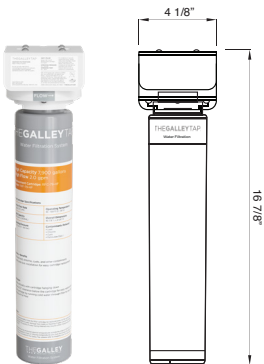

Water Filtration System
(Included)

Water Filtration System

- Service flow rate 2.0 gpm
- Rated capacity 7,900 gallons
- Operating pressure 10 - 125 psi
- Operating temperature 35 - 100°F
- Overall dimensions 16 7/8" x 4 1/8"
- Reduces lead, chlorine, cysts and other contaminants
- Quick twist-lock cartridge replacement
- Replacement filter cartridge dimensions 14 1/2" x 3"
- Internal parts never exposed to human handling
- Filtration protects capital equipment from early breakdown
- Installs vertically (allow 2 1/2" clearance)
- Parts Included: Mounting bracket and screws, plastic tubing, push-fit Tee

Construction

Ideal Tap

- Solid 316L machined stainless steel construction
- Available in Polished, Matte, PVD Gun Metal Gray™, PVD Satin Black, PVD Brushed Gold, PVD Polished Rose Gold
- Indoor & outdoor
- Limited Lifetime Warranty
- Made in Italy

Water Filtration System

- Five Year Warranty
- Made in the USA

Codes/Standards

Ideal Tap

- ASME 112.18.1
- CSA B125.1
- NSF 61, 372
- CALGreen
- UPC
- NPC
- ADA

Water Filtration System

- IAPMO Certified
- NSF/ANSI 42, 53, 372

