


FEATURES

- 3/8" Flexible Hose Connections, 20" length
- Solid brass construction
- Listed by IAPMO, CSA, NSF, and other municipalities
- Warranty:
 - Limited lifetime warranty (residential use)
 - One year (commercial use)

DIAGRAM A – Lavatory Assemblies

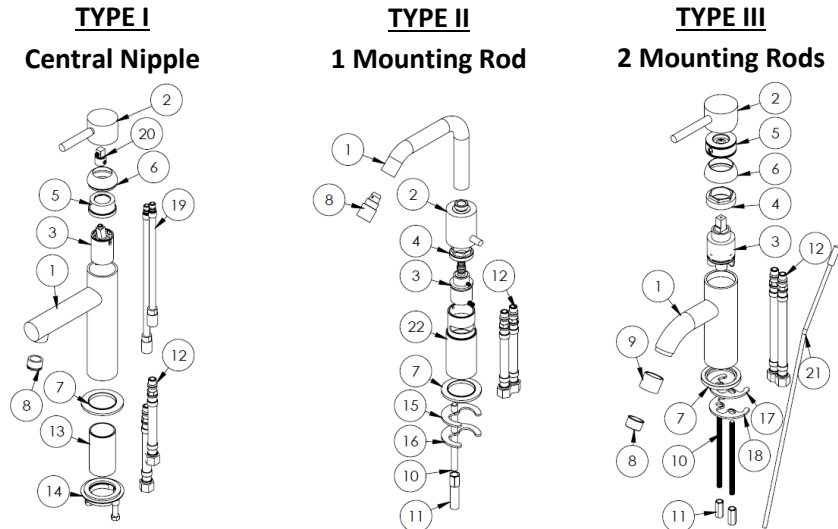

#	Description	#	Description	#	Description
1	Spout	9	Aerator Shell	17	Rubber Mounting Washer
2	Handle Assembly	10	Mounting Rod	18	Steel Mounting Washer
3	Cartridge	11	Mounting Rod Screw	19	Risers
4	Cartridge Adapter	12	Supply Hose	20	Handle Stem
5	Handle Adapter	13	Mounting Nipple	21	Lift Knob
6	Handle Dome	14	Mounting Assembly	22	Spout Body
7	Base Ring	15	Steel Mounting Washer		
8	Aerator	16	Rubber Mounting Washer		

IMPORTANT INSTALLATION INFORMATION

- USE TEFLON TAPE OR PIPE SEALANT FOR THREADED CONNECTIONS
- DO NOT USE PLUMBER'S PUTTY ON ANY OF THE BRASS COMPONENTS
This will cause the finish to tarnish and void the warranty. A non-corrosive Alkoxy Silicone is recommended.
- DURING SWEATING OF LINES DO NOT OVERHEAT CASTING
Overheating may cause damage to internal mechanism
- COPPER ADAPTORS MAY BE REQUIRED TO COMPLETE YOUR INSTALLATION

For technical support, please call 718-257-2800